



# Grease Duct Access Door

Grease Duct Access Doors For Flat Duct Work

## Specifications

- Quick installation
- Fabricated to accept 3 layers of grease duct wrap.
- No tools required to open and close the door.
- Access door outer cover is fabricated from 16 gauge.
- Threaded Rod Conduit enables clean and easy installation.
- CL WARD High Temp Access Door has 2,300°F ceramic rope gasket.
- Meets NFPA 96




## Packaging

- Access Doors are sold as single units.
- Each door includes: High Temp Access Door, Threaded Rod Conduit and 16 gauge access door cover

## Profile

- Available sizes: LHTGDD106GA16 10x06 Flat  
LHTGDD128GA16 12x08 Flat  
LHTGDD1612GA16 16x12 Flat

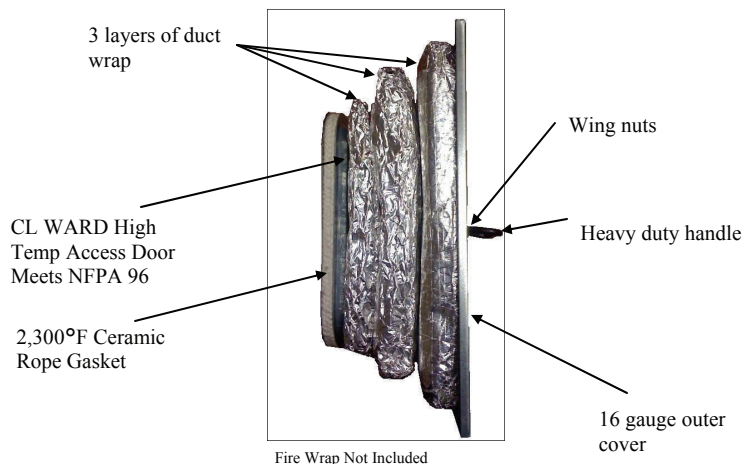

**W**  
**C.L. WARD**  
& FAMILY INC.

1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317  
888.973.7600  
www.clward.com