




SpeedyRail™

Labor Saving 2" Rail and 4" Rail

Specifications

- Available in 2" and 4"
- Manufactured from 22 gauge
- Available in galvanized, stainless, and aluminum
- Conforms to SMACNA Standards with 2 1/8" tab spacing on the 2" rail and 3 1/4" spacing on the 4" Rail
- "Winged" profile for extra strong hold

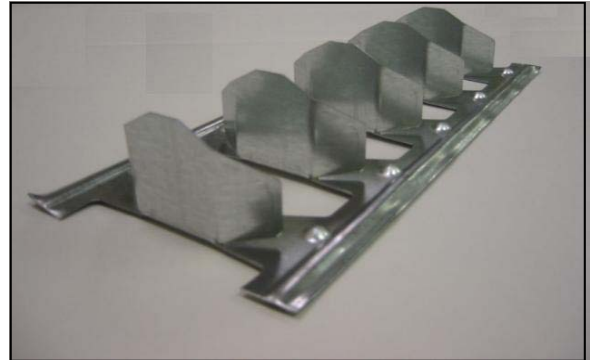

Packaging

Size	Gauge	Ft./Bundle	Wt./Bundle
2" Rail	22	200	39 lbs
4" Rail	22	100	73 lbs

Profile



The "wings" of the SpeedyRail™ provide a tight installation keeping the vane in place.



The "wings" have been specially designed to keep the vane from moving once the vane is installed onto the rail.

Also shown are the rail dimples that provide easy stacking.

W
C.L. WARD
& FAMILY INC.



1460 Delberts Drive
Monongahela, PA 15063
888.973.7600
www.clward.com