



SPEEDYSHOT II

Labor saving gun for fastening CL WARD Flange



Specifications

- Weight - 12.5 lbs
- Recommended Operating Pressure - 80 to 120 p.s.i.
- Air Consumption - Approx 2 c.f.m. at 110 p.s.i.
- Noise - 94 dB sound power level
- Tool uses 1/4" N.P.T. male plug
- Power Source - Clean, regulated compressed air
- Clamping mechanism to ensure accurate fastening
- Inserts fastener in a fraction of a second


Applications:

- For fastening C.L. Ward & Family J-Connect and H-Connect to the raw edge of ductwork.

SpeedyShot II Fasteners

Specifications

- Item code - SS3000 (3,000 per box)
- Coil-collated steel pins for steel to steel connections
- Fastener Length - 3/4" (19mm)
- Shank Diameter - .100" (2.5mm)
- Shank Type - Helical, GripShank®

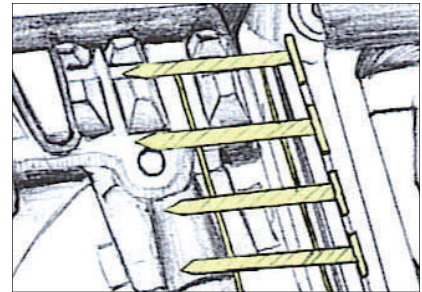

W
C.L. WARD
& FAMILY INC.



1502 Industrial Drive Unit 2
Monongahela, PA 15063
888.973.7600
www.clward.com