


Strap Buckle

Economical and Quick System For Hanging Round Duct Work

Specifications

- No tools required
- Made from galvanized steel
- Provides a suspension point for a hanger rod
- Accommodates 5/16" through 3/8" hanger rod
- Accommodates 1" x 18 GA through 22 GA strapping
- Load rating of 660 lbs.
- Meets SMACNA standards for use on ducts up through 36" round when installed at maximum of 12' spacing

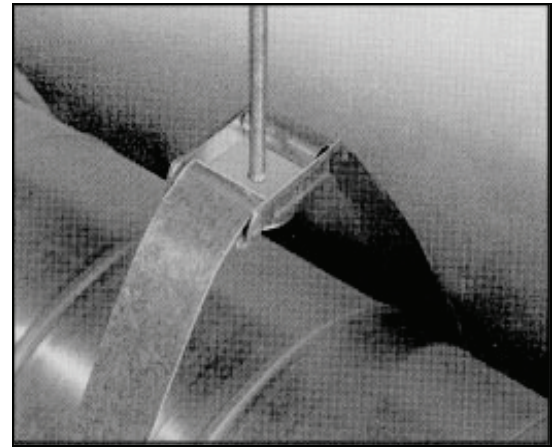


Packaging

- 200 pieces per box –27.5 lbs. per box

Rod
Can use 5/16" - 3/8"

Profile

1" Hanger Strap
Can use gauges 18-22

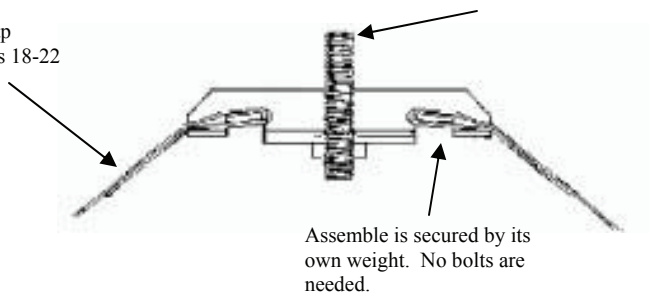

Installation

1. Bend both ends of the strip 3" to 5".
2. Hook the ends through the slots in the bracket.
3. Suspend the assembly from a drop-rod or attach directly to the ceiling.



W
C.L. WARD
& FAMILY INC.

1100 Ashwood Drive Suite 1102
Canonsburg, PA 15317
888.973.7600
www.clward.com