




Tee Gasket

Sealing Tape For TDC & TDF Connections

Specifications

- Solids: 99.8%
- Color: Grey
- Hardness: 77°F - 9.0mm - 10.5mm max
- Shelf Life: 1 year minimum
- Life Expectancy: 20 years minimum
- Plasticizer Migration: No bleed/contact stain
- Staining: No bleed/contact skin
- Elongation & Webbing: 0°F 250% min., 77°F 800% min.
- Service Temperature: -40°F to 190°F
- Flexibility: Passes, no cracking or loss of adhesion
- Water Resistance: Vacuum .75% max, Static 0%
- Adhesion: Excellent to most non-porous surfaces
- Tested to the equivalent of UL 723 and ASTM E 84

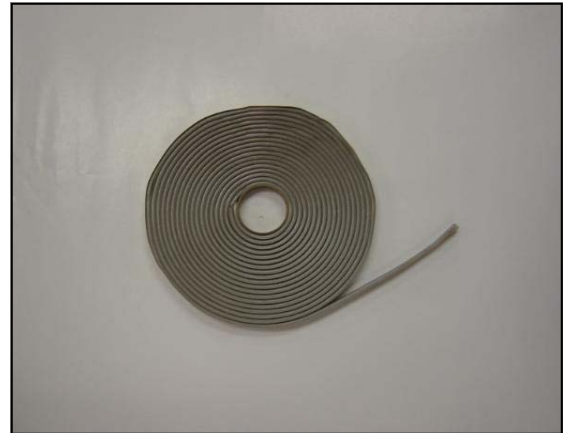

Composition

- This product is made from recycled elastomers, butyl, EPDM rubber, and proprietary co-polymers. The plasticizers are of the Polyisobutylene and Polybutene type and permit no oxidation or migration.

Size

- 3/16" x 5/8"

Packaging

- 500 ft per box, 25 ft rolls, 40 lbs per box

W
C.L. WARD
& FAMILY INC.



1460 Delberts Drive
Monongahela, PA 15063
888.973.7600
www.clward.com