

Press-On Framed Access Doors

CONTACT


Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317


www.clward.com

Detail

- High density fiberglass insulation with UL classification: FHC25/50
- Consist of two, 24 gauge galvanized steel panels, mechanically locked together
- Designed for up to 3" static pressure.
- R-Value of 5
- Available in CAM/CAM and HINGED/CAM
- Meets SMACNA requirements for low pressure doors
- High density, closed cell gasket, which has a service range of – 20° to 100°, is bonded to the inside only of the press-on door frame. Press-on frame has a double sided adhesive gasket on the outside of the door frame that has a service range of -100° to 200°
- All frames are manufactured with spotwelds at each corner for increased strength
- Press-on doors have a durable double sided adhesive gasket that allows an easy installation to metal ductwork
- Hinges are full length galvanized piano hinge secured to both the frame and door with three spot welds
- Cams are manufactured from 16 gauge galvanized steel and secured to the door with a rivet
- Latches are manufactured from 20 gauge galvanized steel and secured to the frame with two spot welds
- Access doors available with chains upon request



Profile

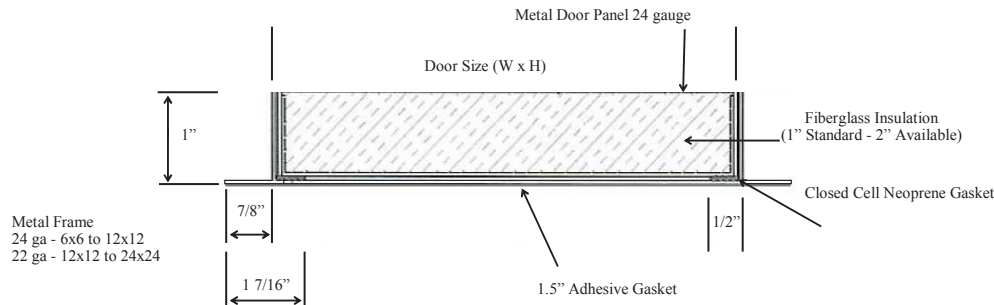

Packaging

CAM	HINGED	PRODUCT DESCRIPTION	PACKAGING	Weight
FDPC6GA	FDPH6GA	6X6 FRAMED DOOR	20/CARTON	31 lbs/carton
FDPC8GA	FDPH8GA	8X8 FRAMED DOOR	20/CARTON	45 lbs/carton
FDPC10GA	FDPH10GA	10X10 FRAMED DOOR	10/CARTON	30 lbs/carton
FDPC12GA	FDPH12GA	12X12 FRAMED DOOR	10/CARTON	39 lbs/carton
FDPC14GA	FDPH14GA	14X14 FRAMED DOOR	10/CARTON	50 lbs/carton
FDPC16GA	FDPH16GA	16X16 FRAMED DOOR	5/CARTON	30 lbs/carton
FDPC18GA	FDPH18GA	18X18 FRAMED DOOR	5/CARTON	38 lbs/carton
FDPC22GA	FDPH22GA	20X20 FRAMED DOOR	5/CARTON	45 lbs/carton
FDPC24GA	FDPH24GA	24X24 FRAMED DOOR	5/CARTON ²⁰	60 lbs/carton

