


J Flange - H Flange

Detail

J Flange

- Roll formed from 20 gauge
- Tested to a SMACNA J Rating
- Integrated sealant pocket for airtight seal
- Available in 10' and 20' bundles
- Meets NFPA 90A & B Class 1 (Sealing Requirements)
- Recommended for 16 gauge to 26 gauge duct work
- Available in galvanized, aluminum, aluminized, SS 304, SS 316 and galvanneal



J Corner

- Stamped from 11 gauge
- Supplied with nuts and bolts in box (3/8" x 1" carriage bolt)
- Available in galvanized, aluminum, aluminized, ss 304, ss 316 and galvanneal



H Flange

- Roll formed from 22 gauge
- Tested to a SMACNA H Rating
- Integrated sealant pocket for airtight seal
- Available in 20' bundles
- Meets NFPA 90A & B Class 1 (Sealing Requirements)
- Recommended for 20 gauge to 26 gauge duct work
- Available in galvanized, aluminized and galvanneal




H Corner

- Stamped from 11 gauge
- Supplied with nuts and bolts in box (1/4" x 1" carriage bolt)
- Available in galvanized, aluminized and galvanneal



Profile

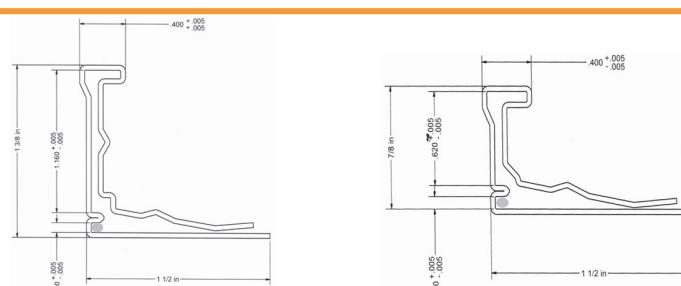

Packaging

Item	Description	Packaging	Weight
LJ15GA	J Flange 20 ft., Galvanized	1,500 ft/bundle	1,100 lbs/bundle
LJ75GA10	J Flange 10 ft, Galvanized	750 ft/bundle	550 lbs/bundle
LH15GA	H Flange 20 ft., Galvanized	1,500 ft/bundle	800 lbs/bundle
LJCGA	J Corners, Galvanized (with Nut & Bolt)	200 pcs/box	60 lbs/box
LHCGA	H Corners, Galvanized (with Nut & Bolt)	400 pcs/box	50 lbs/box

GA = Galvanized, S4 = Stainless Steel 304, S6 = Stainless Steel 316, GN = Galvanneal, AL = Aluminum, AZ = Aluminized, PVC = PVC Coated

CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com