


CRD - 58DD/58EAD Series

Detail

- Insulated register boot with ceiling radiation damper
- UL Classified - For use in UL 263 wood truss floor/ceiling assemblies rated 1 hour
- UL approved for use in L-587 and L-528 and P-556 design
- Incorporates UL 555C evaluated CRD
- 22 gauge one piece frame and blades
- 165°F fusible link (optional 212°F)
- Standard Link (on 4") and Easy Access Link (5" and up)
- **58DD** Factory Installed Ductboard Box - 1 1/2" R-6 or 2" R-8
- **58EAD**, Field Installed Ductboard Box - 1 1/2" R-6 or 2" R-8
- Ceramic thermal blanket provided on units with blade areas of greater than 84 sq. in.
- Available in a range of sizes from 4" x 8" to 20" x 16"



58EAD

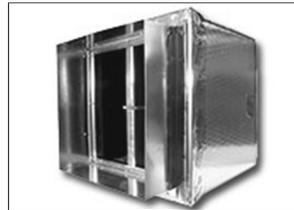

58DD


CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com

Profile

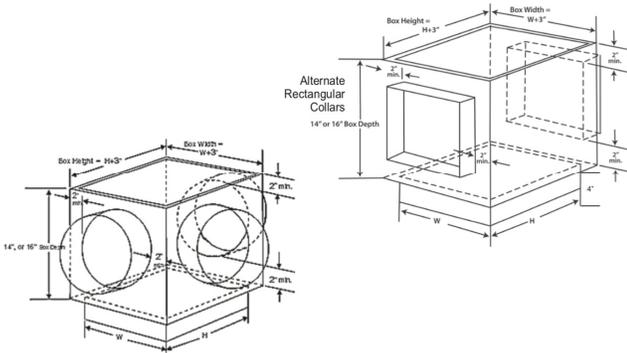

This product meets the requirements for ceiling dampers established by:
UL Standard 555C
NFPA Standard 90A
ICC Building Codes

Item Code Format

5	8	D	D	1	6	1	2	G	1	R	6	1	4
---	---	---	---	---	---	---	---	---	---	---	---	---	---

SERIES: CRD 58 w/Ductboard Box
Factory Installed Box D - Duct Drop
Damper Width
Damper Height
G = Galvanized 165° Link
H = Galvanized 212° Link
1 - 1" Flange
R6 = 1 1/2" Insulation
R8 = 2" Insulation
Box Height
14 = 14"
16 = 16"

5	8	E	A	D	1	2	0	8	G	1	R	6
---	---	---	---	---	---	---	---	---	---	---	---	---

SERIES: CRD 58 w/Ductboard Box
Field Fabricated Box Connection at bottom of box
D - Duct Drop
Damper Width
Damper Height
G = Galvanized 165° Link
H = Galvanized 212° Link
1 - 1" Flange
R6 = 1 1/2" Insulation
R8 = 2" Insulation



Manufactured by:



Job Name	
Location	
Architect	
Engineer	
Contractor	