


Press On Conical

Detail

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- G-90 available upon request
- Available in Specialty Metals:
 - Aluminum (ASTM B209 Alloy 3003 Temper H14)
 - 304 Stainless Steel (ASTM A480 2B Finish)
- Pressure Rating: Designed per SMACNA Third Edition 2005 Section 4.8 Figure 4-6 Brand Connections
- Tested to meet SMACNA Leakage Class 3 requirements (Test performed on fittings with no damper)
- Seams and colatch sealed with zero VOC integral sealant
- Dimensional Tolerance: $\pm 1/4"$
- Available with 3/8" continuous rod and hardware

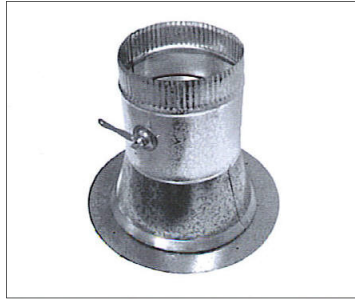


CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com

Profile

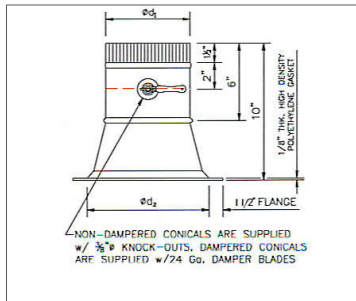

Conical	Option	Press On	Riveted	Diameter	Material	Gauge	G 90	Option
CN	S15, S2 = 1.5" or 2" Stand off option	P	R	4" to 20"	GA - Galv. S4 - SS304 AL - AL	26,24 26 32	90	DS= Damper DCS= 3/8" Rod, Damper DS38 = 3/8" Rod, Sure Loc Handle

Item Code Example: CNS2PR6GA26DS = Press On Conical, 2" Stand-off, 6", Galv., 26 ga, w/Damper

Packaging

Product Availability					
Size ød1	Gauge Availability		Quantity		Dimension ød2
	26 Ga.	24 Ga.	Carton	Skid	
4"	YES	-	20	200	5.75"
5"	YES	YES	20	200	6.75"
6"	YES	YES	20	160	7.75"
7"	YES	YES	8	112	8.75"
8"	YES	YES	8	112	9.75"
9"	YES	YES	8	112	10.75"
10"	YES	YES	8	72	11.75"
12"	YES	YES	5	40	13.75"
14"	YES	YES	5	40	15.75"
16"	YES	YES	5	40	17.75"
18"	YES	YES	3	36	19.75"
20"	YES	YES			21.75"

Dampened fittings are available with 1.5" or 2" Stand-Off.